




ifi

Mercury3.0

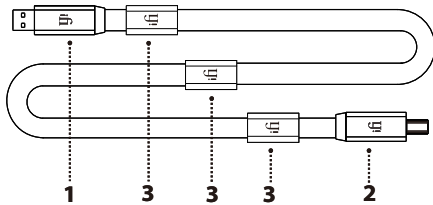

1.USB 'A' connector

Please insert the FINAL USB type 'A' connector into the computer or iUSB3.0 labelled '  +  '.

2.USB 'B' connector


Please insert the FINAL USB type 'B' 3.0 or 2.0 (depending upon the version purchased)connector labelled 'iFi' into the USB port of the DAC or the iPurifier2 /iUSB 3.0(which is then connected to the DAC).

3.RF³Silencers

All USB cables, due to their inherent nature, inevitably pickup AND radiate radio frequencies that negatively impact the sonic performance.

On the Mercury USB3.0 cable, there are three sets of RF³ Silencers. The two outer ones are best located at each respective end.

Note: The custom-designed metal oxide ceramic RF³ Silencers offer different permeabilities. Compared to generic filters this atypical approach is incredibly effective; over the widest frequency range.

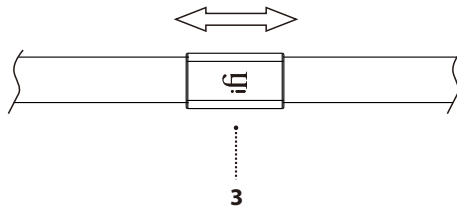

Feel free to adjust the central third Silencer to attain the optimal sonic performance.

Tip: To start with, set the three RF³ Silencers to the 'Golden Ratio', with the shorter section closer to the USB 'B' connector (item 3 above).

Specifications

USB (Data) / USB (Power)

Construction:	Minimu inductance parallel construction
Conductors:	24 and 28AWG
Conductor material:	Heavy OFHC continuous cast copper silver matrix
Insulation:	HD Polyethylene
Shielding:	Quadruple-shields
Impedance:	90 Ohms
AC spark insulation:	1500V
Connectors:	iFi 'FINAL' USB connectors
Insulation resistance:	100 Mohm
Tensile strength:	1500PSI
Lengths/Net weight:	0.5m (19.7") / 98 g (0.22 lbs) 1.0m (39.4 lbs) / 115 g (0.25 lbs) 1.8m (70.9 lbs) / 153 g (0.33 lbs) 3.0m (118.1 lbs) / 228 g (0.50 lbs)

Limited Warranty: 12months*

*12 months typical or as permitted/required by local reseller laws.

**Specifications are subject to change without notice.